

by Integrated Paving Concepts Inc.



StreetPrint[®]

Genuine Stamped Asphalt

makers of

tooling

templates

infrared equipment

for decorative stamped asphalt



pattern
catalog

popular patterns

Traditional Brick




Offset Brick

Brick Size: 4-3/4"x9-5/8"
(12.4cm x 24.3cm)




Frisco Cobble

Brick Sizes: 5-3/4"x 5-3/4"
and 11-3/4" (14.6cm x
14.6cm and 29.8cm)



Diagonal Herringbone

Brick Size: 4-7/8" x 9-3/4"
(12.3cm x 24.7cm)




Herringbone

Brick Size: 4-7/8" x 9-3/4"
(12.3cm x 24.7cm)



Tile Sets

Brick Size: 4", 8", 10" and 12"
(10.1, 20.3, 25.4, and 30.4cm)




Ashlar Slate

Brick Size: 3" to 16"
(7.6cm to 40.56cm)




Basketweave

Brick Size: 4"x12"
(10.1cm x 30.4cm)



Eurofan

Brick Sizes: 3" to 4" x varies
(7.6cm to 10.1cm x varies)




Scallop

Brick Size: 4-1/2" x varies
(11.4cm x varies)



British Cobble

Brick Size: 4-7/8" x varies
(12.3cm x varies)

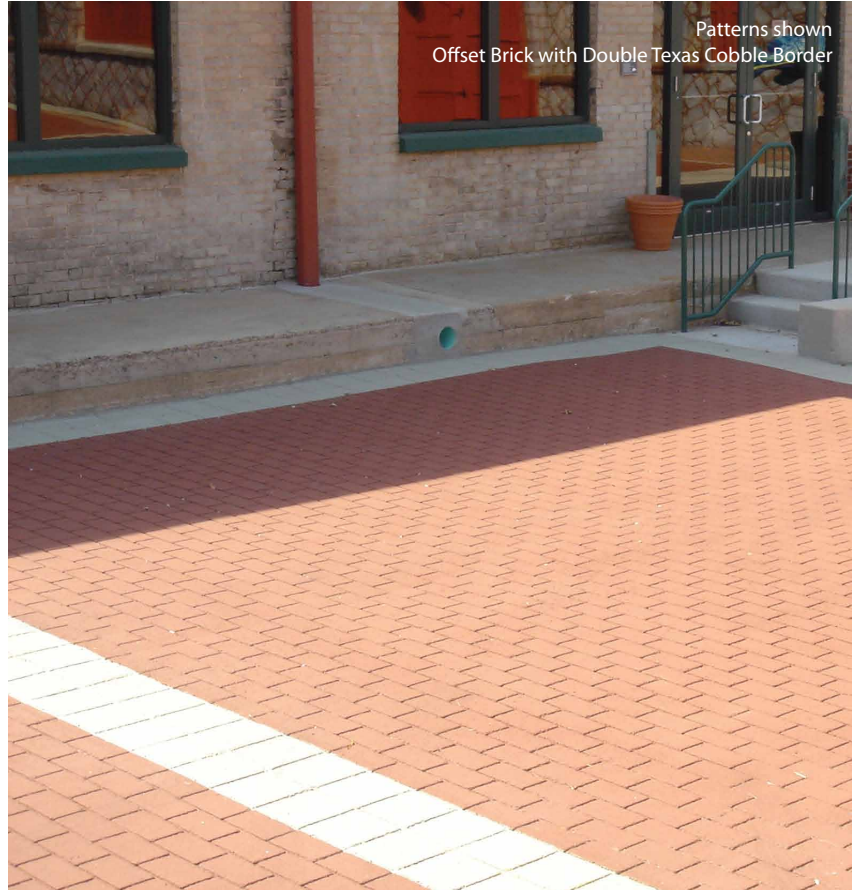


Patterns shown
Offset Brick with Double Texas Cobble Border


popular patterns

Borders


Soldier Course




Double Stacked Brick




Double Texas Cobble




End-to-End



Stacked Brick




Texas Cobble



Stone



Brick Size: varies 4" to 1'-4"
(varies 10cm to 40cm)



Brick Size: varies 8" to 2'
(varies 20cm to 60cm)



Brick Size: varies 8" to 12"
(varies 20cm to 30cm)




Brick Size: varies 1' to 3'
(varies 30cm to 90cm)

Accents & Special Use






3'-10" x 4'-3"
(1.1m x 1.3m)





3'-3" up to 73'-2" Radius
(1m to 22.2m Radius)

Playground

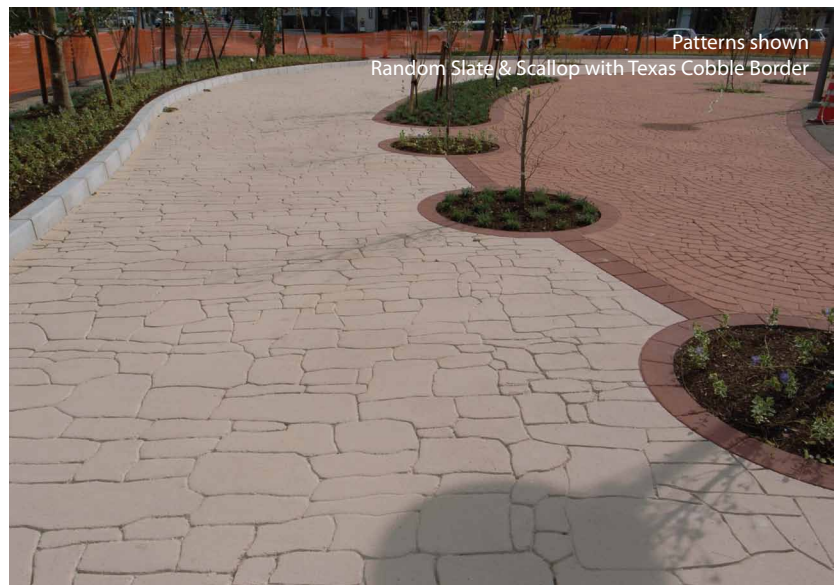

custom stamping templates

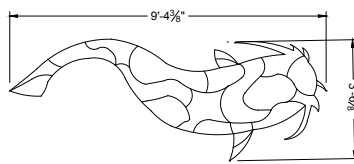



Custom StreetPrint Template Design Parameters

StreetPrint designs can range from traditional brick patterns to customized motifs and logos. The installation and manufacturing processes can place some limitations, not only on what can and cannot be done, but what looks aesthetically pleasing as well. Manufacturing and Installation considerations should be taken into account when thinking about using custom StreetPrint patterns.



The templates are constructed of 3/8" swaged wire rope pieces welded together to create a pattern.

Manufacturing Limitations



The spacing between the welds should be a minimum of 3" (76mm) apart, and a maximum of 12" (305mm) apart.

When welds are closer or spanning farther than recommended, a number of problems can occur: welding difficulties, dense and heavy templates, or flimsy non-rigid templates

Template Sizing & Pattern

Template Size – For production & applicators in the field, template size is important for handling. The recommended size for a repeatable template is about 9'x6' (2.7m x 1.8m).

Pattern Consideration - Repeatability & Interlock – It is most ideal to create pattern that can be repeated, mirrored, and overlap onto itself within the 9'x6' (2.7m x 1.8m) recommended template size. This is to provide maximum flexibility to the applicator in the field, and to limit confusion and installation mistakes.